


# iLM704-801 SERIES

## CHARACTERISTICS:

DISPLAY CONTENT: 8 × 1 CHARACTERS  
 LCD TYPE: STN GRAY  
 LED BACKLIGHT: WHITE  
 CONTROLLER: KS0066 OR EQUAL  
 OPERATING TEMPERATURE: NORMAL(0–50°C); WIDE(–20–70°C)  
 POWER SUPPLY: 5.0V  
 VIEWING ANGLE: 6H; 12H

## DIMENSIONS/DISPLAY CONTENT

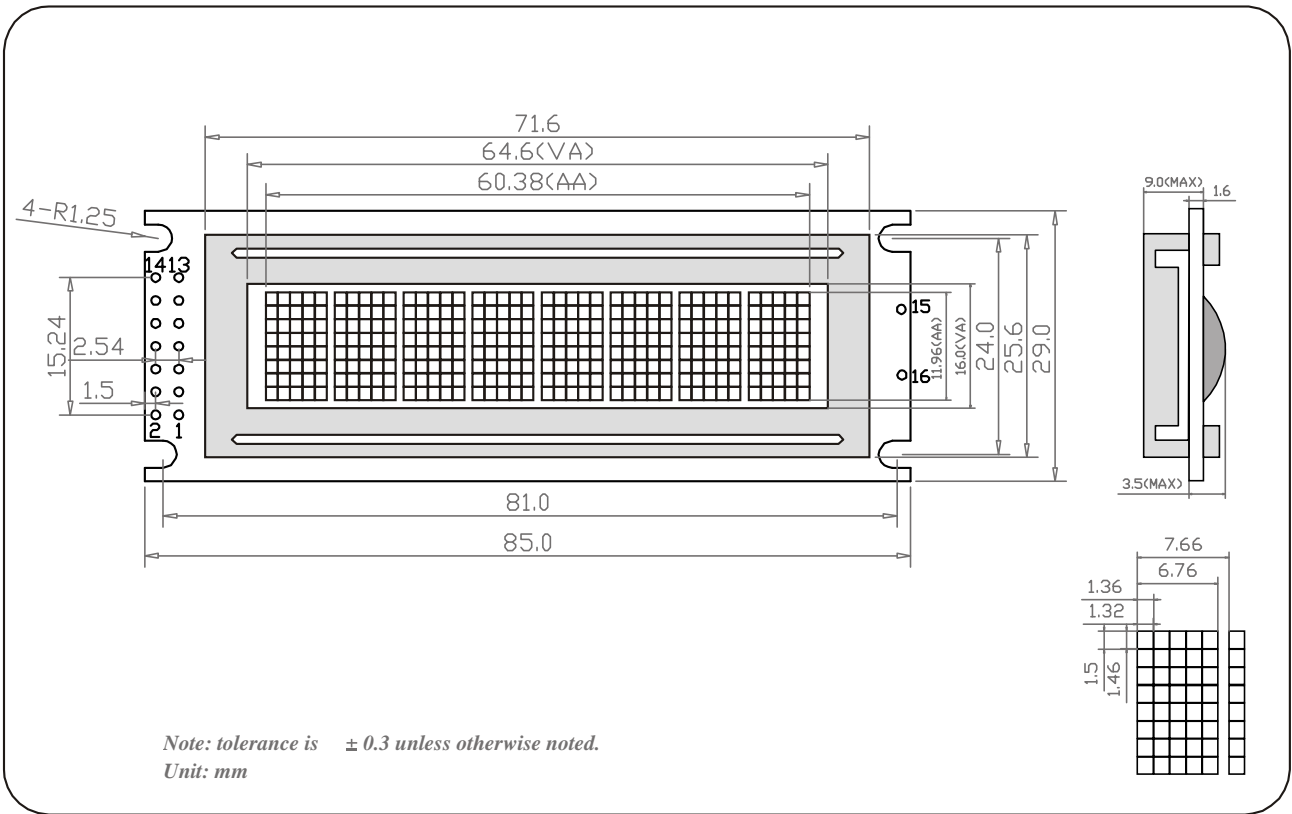

## PIN CONFIGURATION

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VDD	VSS	V0	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK

## PARAMETER (VDD=5.0 ± 10%, VSS=0V, Ta=25°C)

Parameter	Symbol	Standard Values			Unit
		Min.	Typ.	Max	
Supply voltage	VDD-VSS	4.5	5.0	5.5	V
Input voltage	H	V <sub>IH</sub>	2.2	-	
	L	V <sub>IL</sub>	-0.3	0.6	
LCD Drive Voltage	-	-	4.7	-	
Operating current	I <sub>DD</sub>	-	1.2	3.0	mA

## APPLICATION CIRCUIT

